

Technical Specifications

707 Luxton Electric Instantaneous Water Heater	
Power Rating	3.3 kW, 230 V a.c. 50 Hz
Rated Pressure	0 MPa
Inlet & Outlet Water Connection	1/2" BSP
Minimum Water Flow Rate	3ℓ/min
Recommended Water Flow Rate	4 – 6ℓ/min
Minimum Inlet Water Pressure	0.1 MPa
Maximum Inlet Water Pressure	0.3 MPa
Recommended Inlet Water Pressure	0.1 MPa
Energy Efficiency Rating	4 Ticks ELS-CHG-WH250020
Product Dimensions (L x H x W)	190 x 338 x 85 mm
Product Weight	1.6 Kg
Box Dimensions (L x H x W)	211 x 631 x 102 mm
Box Weight	2.8 Kg
Barcode	77779999102468

Packaging Contents

Electric Instantaneous Water Heater
HydroJet Ag+ Chrome Shower Set
Chrome Stop Valve
User Manual & Instruction Guide


Cheong Hock Guan Water Heater Centre Pte Ltd
60 Paya Lebar Road, #04-17 Paya Lebar Square, Singapore 409051
☎ 6749 8885 ✉ mail@chg.com.sg 🌐 chg.com.sg 🌐 707.com.sg



Copyright © 2026 Cheong Hock Guan Water Heater Centre Pte Ltd. All rights reserved. Products and specifications may vary due to product improvement purpose.

Made in Singapore

facebook.com/707myfamilyheater

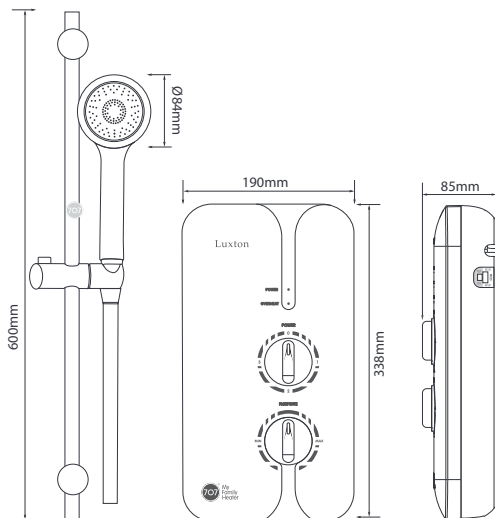

Luxton

Electric Instantaneous Water Heater

Reliability And Safety You Can Trust



HydroJet Ag+ Showerhead



Copper Class Tank



Double Pole Residual Current Device (RCD)



5 Year Warranty on Tank



2 Year Warranty on Parts



2 Year Warranty on Service



Winner, SPBA - Heritage Brands



Giving the best we can through
knowledge and understanding
707.com.sg



Luxton

Electric Instantaneous Water Heater

Reliability And Safety You Can Trust

Experience luxurious showers with the 707 Luxton and its powerful HydroJet Ag+ high pressure showerhead with antibacterial properties. This remarkable water heater is equipped with reliable safety features – double safety anti-scald protection, residual current device (RCD) and an overheat warning indicator. Enjoy safe and relaxing showers with 707 Luxton.



Ag+ Silver Ion Technology



Normal Showerhead



Micro-Nozzle Showerhead



HydroJet Ag+ Showerhead

Features Ag+ silver ion technology that inhibits bacteria growth, and the micro-nozzle shower head design that delivers ultrafine water jet and powerful water pressure.



Copper Class Tank

Features a reliable and durable copper tank.



Double Pole Residual Current Device (RCD)

Cuts off power supply immediately when leakage current is detected.



Pressure Differential Flow Switch (PDFS)

Safe and dependable flow switch that activates power to the water heater only after user turns on the water supply to the water heater.



User Friendly Power Selector

Easy to use power selector with 3 power settings.



Flow Rate Control

Achieve your desired water temperature by adjusting water flow rate.



Double Safety Anti-Scald Protection

Double detection safety system cuts off power supply immediately when water temperature rises to scalding levels.



Overheat Warning Indicator

Warning indicator lights up to alert you when water temperature exceeds normal range.



IP25 Splash Proof

The heater internal components and parts are protected by a sturdy splash-proof exterior casing.



Energy Efficiency Rating

Tested to meet Singapore's energy efficiency standards with a 4-tick rating.



Pledge of Safety

Tested repeatedly for safety and compliance with Singapore safety standards. We commit to keep you safe while giving you the luxurious shower experience.